



## Roof more than 4 in 12 but less than 8 in 12

Falls from elevation are one of the leading causes of injuries to construction workers in British Columbia.


Fall protection systems must be used

- When there is a possibility of a fall of 3 m (10 ft.) or more, OR
- Where a fall from a height of less than 3 m (10 ft.) involves a risk of injury greater than the risk of injury from the impact on a flat surface

### Selecting fall protection

- When determining which fall protection system is most practicable, you must always follow the fall protection hierarchy as set out in section 11.2 of the Occupational Health and Safety Regulation.

**First consideration**—Are guardrails practical?

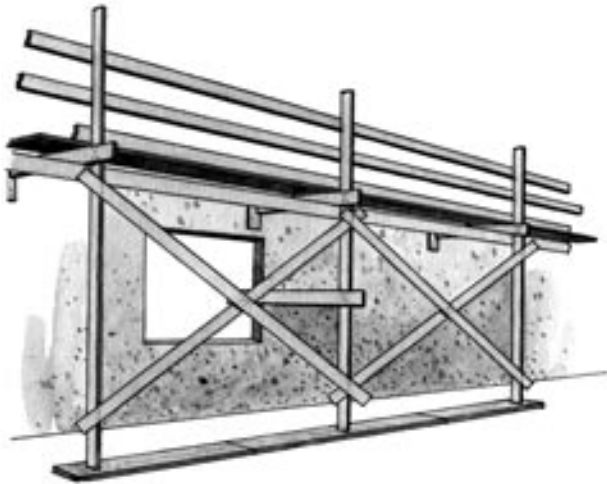


**Second consideration**—Can another fall restraint system be used?



**Third consideration**—Can a fall arrest system be used?



**Fourth consideration**—If none of these systems can be used, other written procedures acceptable to WorkSafeBC can be used.



Project: \_\_\_\_\_ Address: \_\_\_\_\_

Employer: \_\_\_\_\_ Supervisor: \_\_\_\_\_

Date: \_\_\_\_\_ Time: \_\_\_\_\_ Shift: \_\_\_\_\_

Number in crew: \_\_\_\_\_ Number attending: \_\_\_\_\_

Other safety issues or suggestions made by crew members:

---

---

---

---

---

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: \_\_\_\_\_

---

Manager: \_\_\_\_\_ Supervisor: \_\_\_\_\_

*(signature)*

*(signature)*



WORKING TO MAKE A DIFFERENCE  
worksafebc.com